

COTECH

PPCR

Extendable blade with rotating wings



1-418-898-4444
service@cotech.ca
www.cotech.ca





ROTATING WINGS

Greasable wings supported by a UHMW-coated rotary axis that facilitates rotation and resists premature wear and tear. Equal snow capacity whether pushing or back-dragging. Rapid action response allows for quick direction changes.



STRAIGHT CUTTING EDGE

A cleaner, more efficient scrape for both pushing and back-dragging. Cutting edge is available in UHMW or rubber.




FLOATING WINGS

Allow the blade to follow the ground, reducing snow lost. Angular end of blades to help overcoming obstacles.



PARALLEL LINKAGE

User-friendly design. Increases performance (over conventional plows) by as much as 20%. Allows to get closer to obstacles, such as garage doors and vehicles. Reduces all risk of accident. Increases the stability of the blade during transport.

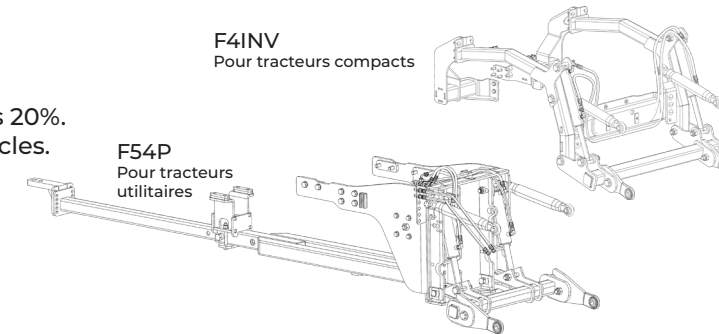

CONCEIVED AND DESIGNED TO RESIST FREEZING

The angular design of the PPCR's parts keeps them from freezing.



TRIP SYSTEM (optionnal)

Remove snow with peace of mind thanks to the complete trip system of the blades. With a trigger to 45 degrees, you will be able to decrease the risk of damage to your equipment as well as the risk of injury during your snow removal operations.



CURVED MOLDBOARD

High curve rolls snow off quickly.



AVAILABLE MODELS AND SPECS:

Product number	Recommended tractor HP and weight	Width open	Width closed	Inside height	Depth in «pull» position	Depth in «push» position	Weight lbs	Linkage Type
PPCR30610	45/65hp from 4 000 to 5 000 lbs	125"	77"	30"	21"	22"	1275	F4INV
PPCR30712	55/85hp from 4 000 to 7 000 lbs	149"	89"	30"	21"	22"	1430	F4INV
PPCR34712-HD	65/115hp from 7 000 to 12 000 lbs	150"	90"	33"	25"	27 1/8"	1600	F54P
PPCR34813-HD	95/115hp from 10 000 to 14 000 lbs	159"	99"	33"	25"	27 1/8"	1900	F54P

PPCR-L, PPCR-SKST FOR LOADERS & SKID STEERS



WATCH IT NOW!



Scan QR code



PPCR-L

WATCH IT NOW!



Scan QR code




PPCR-SKST


The revolutionary PPCR-L and PPCR-SKST skid steer attachment include a mechanical float, a lateral float system and a trip system, all in a single mechanism

- It absorbs the acceleration and deceleration of the skid steer while keeping constant downward pressure
- It maintains constant pressure on the plow during the hopping motion of the tractor
- Optimizes tractor traction
- Makes the tractor easier to use and maneuver.

Product number	Recommended machine HP and weight	Width open	Width closed	Inside height	Depth in «pull» position	Depth in «push» position	Weight lbs
PPCR30610-L	45/65HP from 4 000 to 5 000 lbs	125"	77"	30"	21"	22"	1275
PPCR30712-L	55/85hp from 4 000 to 7 000 lbs	149"	89"	30"	21"	22"	1430
PPCR34712-HD-L	65/115hp from 7 000 to 12 000 lbs	150"	90"	33"	25"	27 1/8"	1600
PPCR34813-HD-L	95/115hp from 10 000 to 14 000 lbs	159"	99"	33"	25"	27 1/8"	1900
PPCR30610-SKST	45/65HP from 4 000 to 5 000 lbs	125"	77"	30"	21"	22"	1275
PPCR30712-SKST	55/85hp from 4 000 to 7 000 lbs	149"	89"	30"	21"	22"	1430
PPCR34712-HD-SKST	65/115hp from 7 000 to 12 000 lbs	150"	90"	33"	25"	27 1/8"	1600
PPCR34813-HD-SKST	95/115hp from 10 000 to 14 000 lbs	159"	99"	33"	25"	27 1/8"	1900

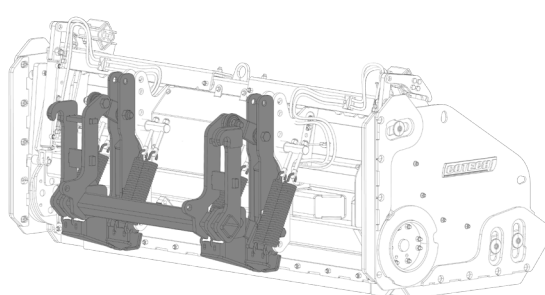

PP-L trip system for loaders.
Weight 150-300 lbs depending models

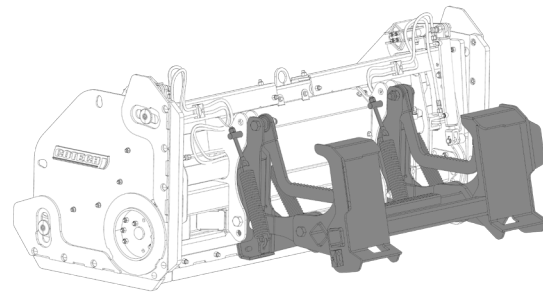

SKST-PP trip system for Skid Steer.
Weight 275 lbs.



COTECH INC. 412 route de la station ST-ÉLOI (QC) G0L 2V0
418-898-4444

